SERVICE MANUAL

FISHER

STEREO GRAPHIC EQUALIZER
WITH REQ-9060 WIRELESS
REMOTE CONTROL

EQ-9060

(EUROPE)

139 233 40

SPECIFICATIONS

Remote Control (REQ-9060) ..... 22-function, wireless remote control
Input Impedance 50kΩ
Output Impedance 2kΩ
T.H.D. (Flat Position)
at 1V Output 0.01%
at 5V Output 0.01%
T.H.D. (Max Position)
at 1V Output 0.04%
at 5V Output 0.04%
Gain (Flat Position) ..... < ±0.2dB
Frequency Response
20Hz - 20kHz ..... ±0.5dB

Tone Control Response
Center of Frequency ..... ±10%
64Hz ..... ±10dB
160Hz ..... ±10dB
400Hz ..... ±10dB
1kHz ..... ±10dB
2.5kHz ..... ±10dB
6.3kHz ..... ±10dB
15.6kHz ..... ±10dB
S/N (IHF A, Reference 1V, Flat Position) 100dB
Crosstalk
10Hz ~ 20kHz 50dB

GENERAL

Power Requirements ..... AC : 220V
(50/60Hz) 20Watts
AC Outlet 1
Dimensions (WxHxD) ..... 440 x 115 x 290 mm
Weight (approx) 3.9kg

– Specifications and design are subject to change without notice. –

REFERENCE No. WM-570354

Fisher EQ 9060 GFGF Archiv

SCHEMATIC DIAGRAM

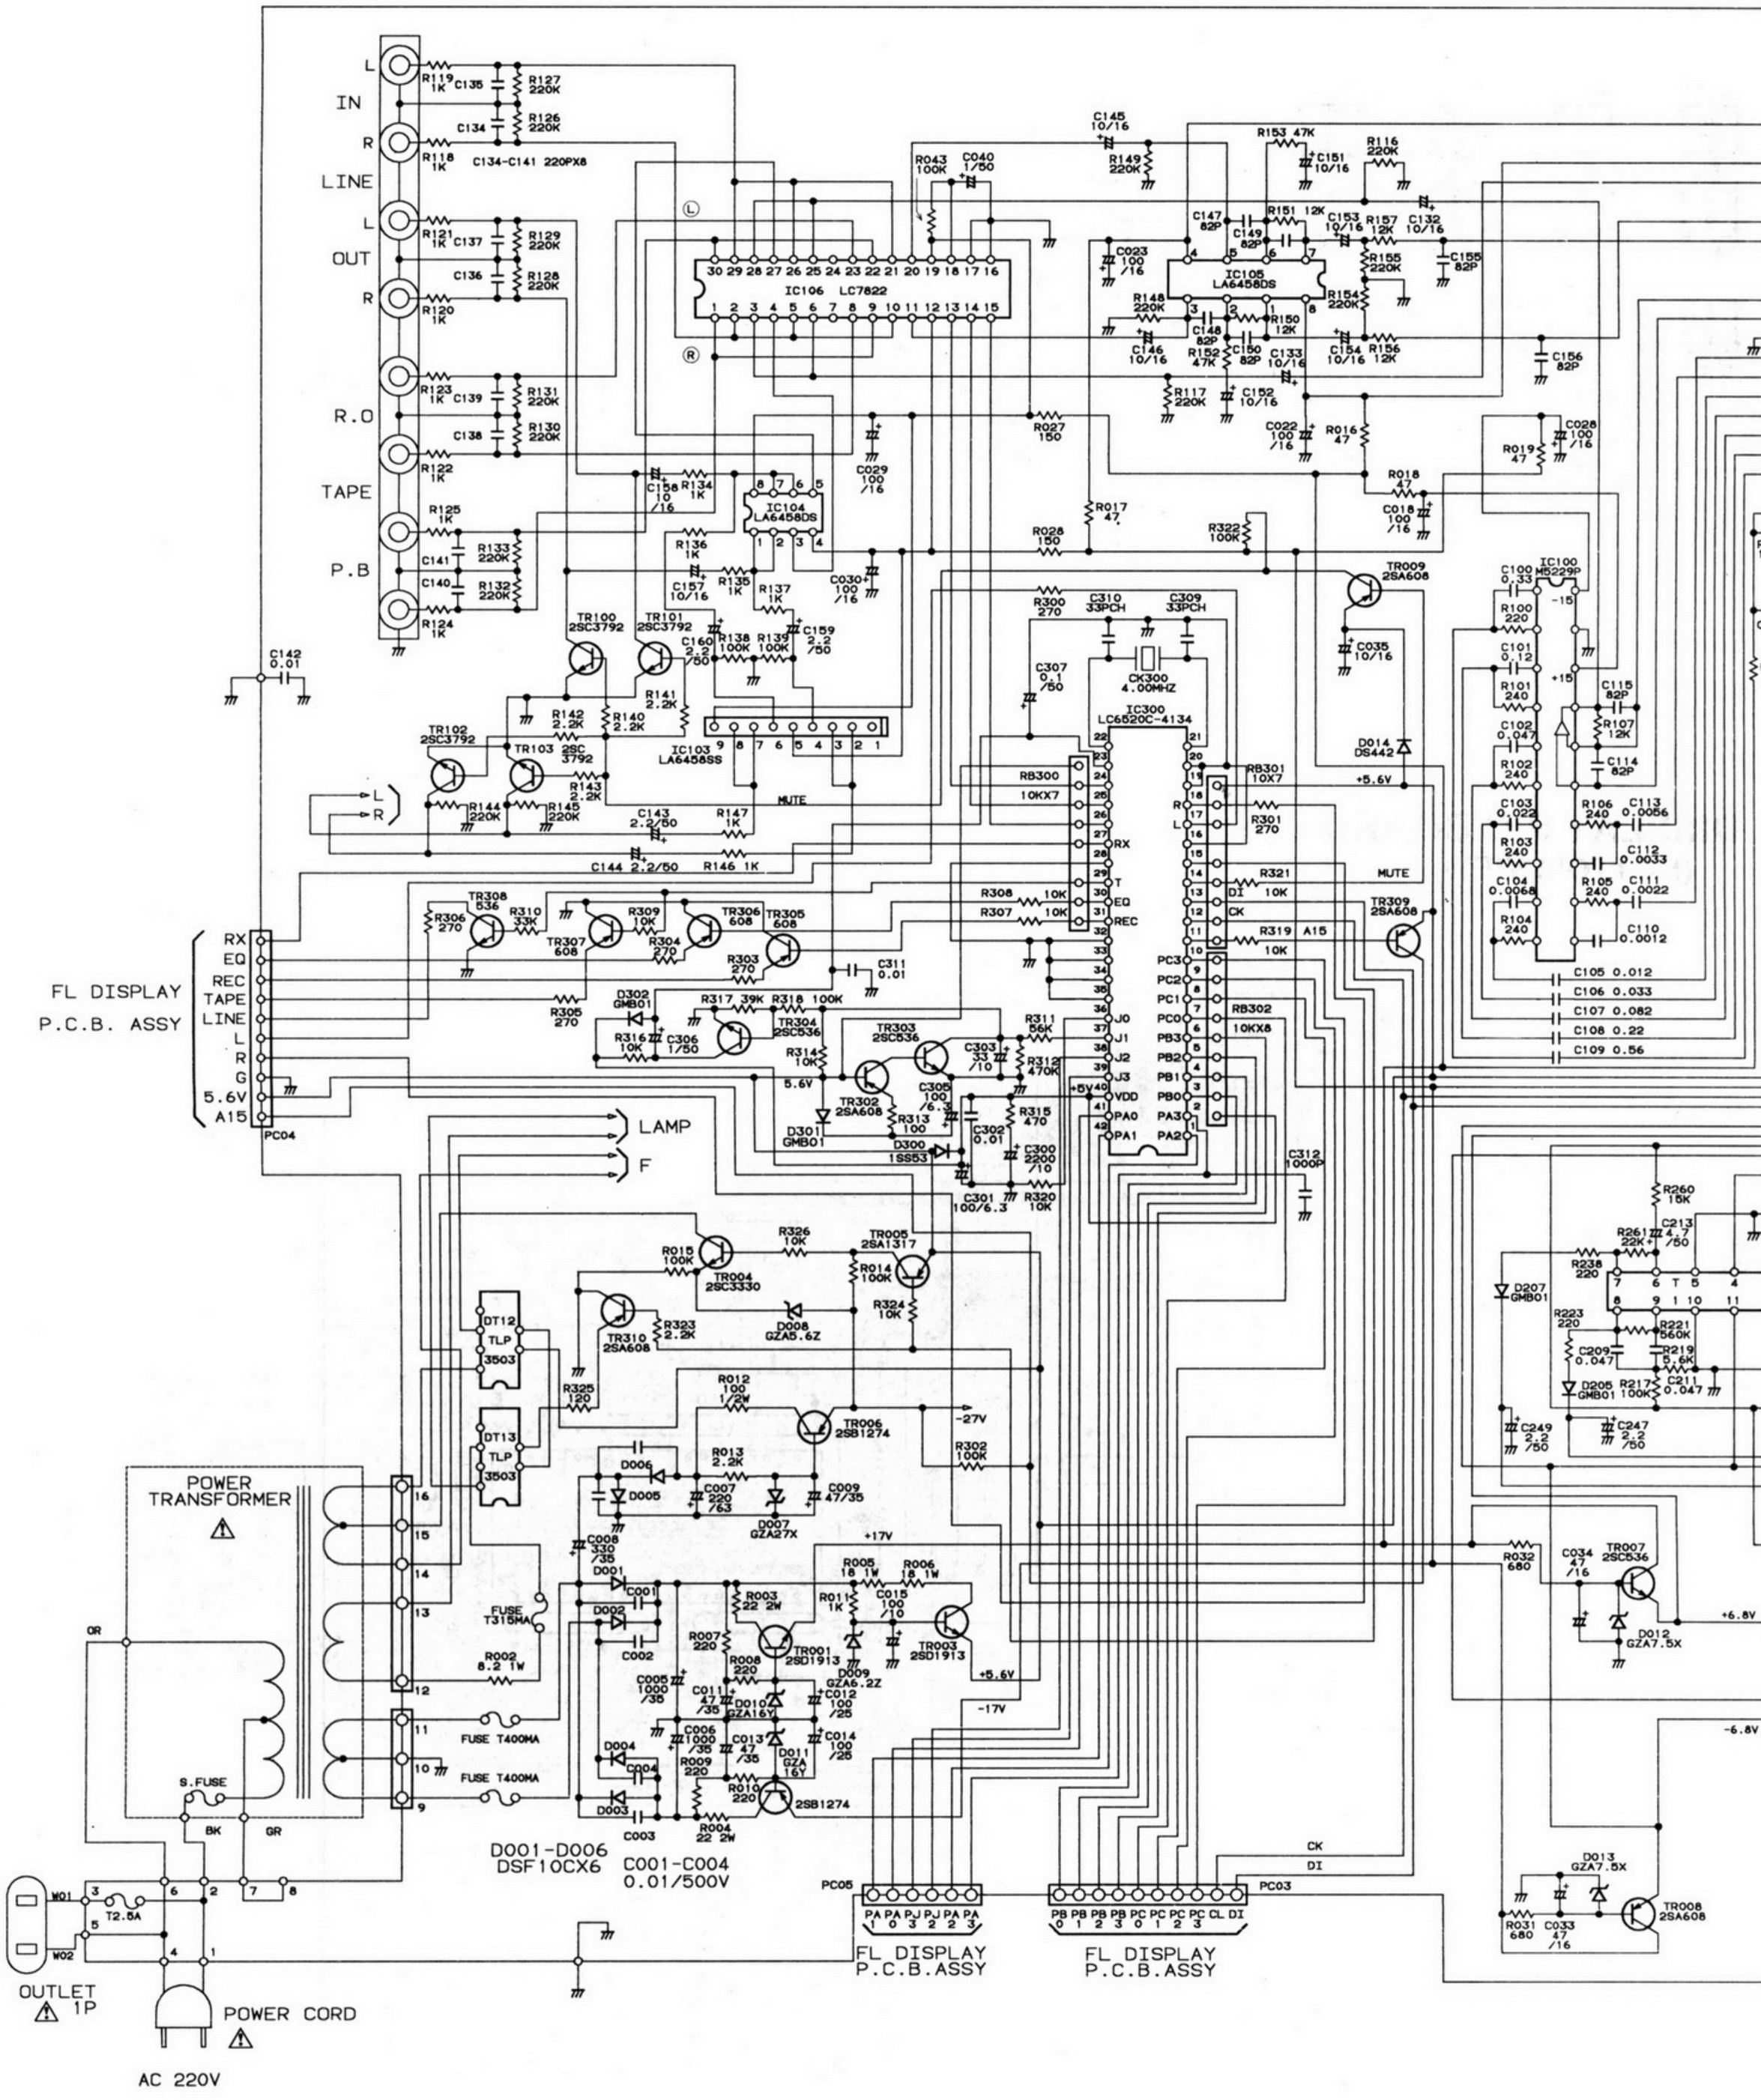

Fisher EQ 9060 GFGF Archiv

DIAGRAM (1)

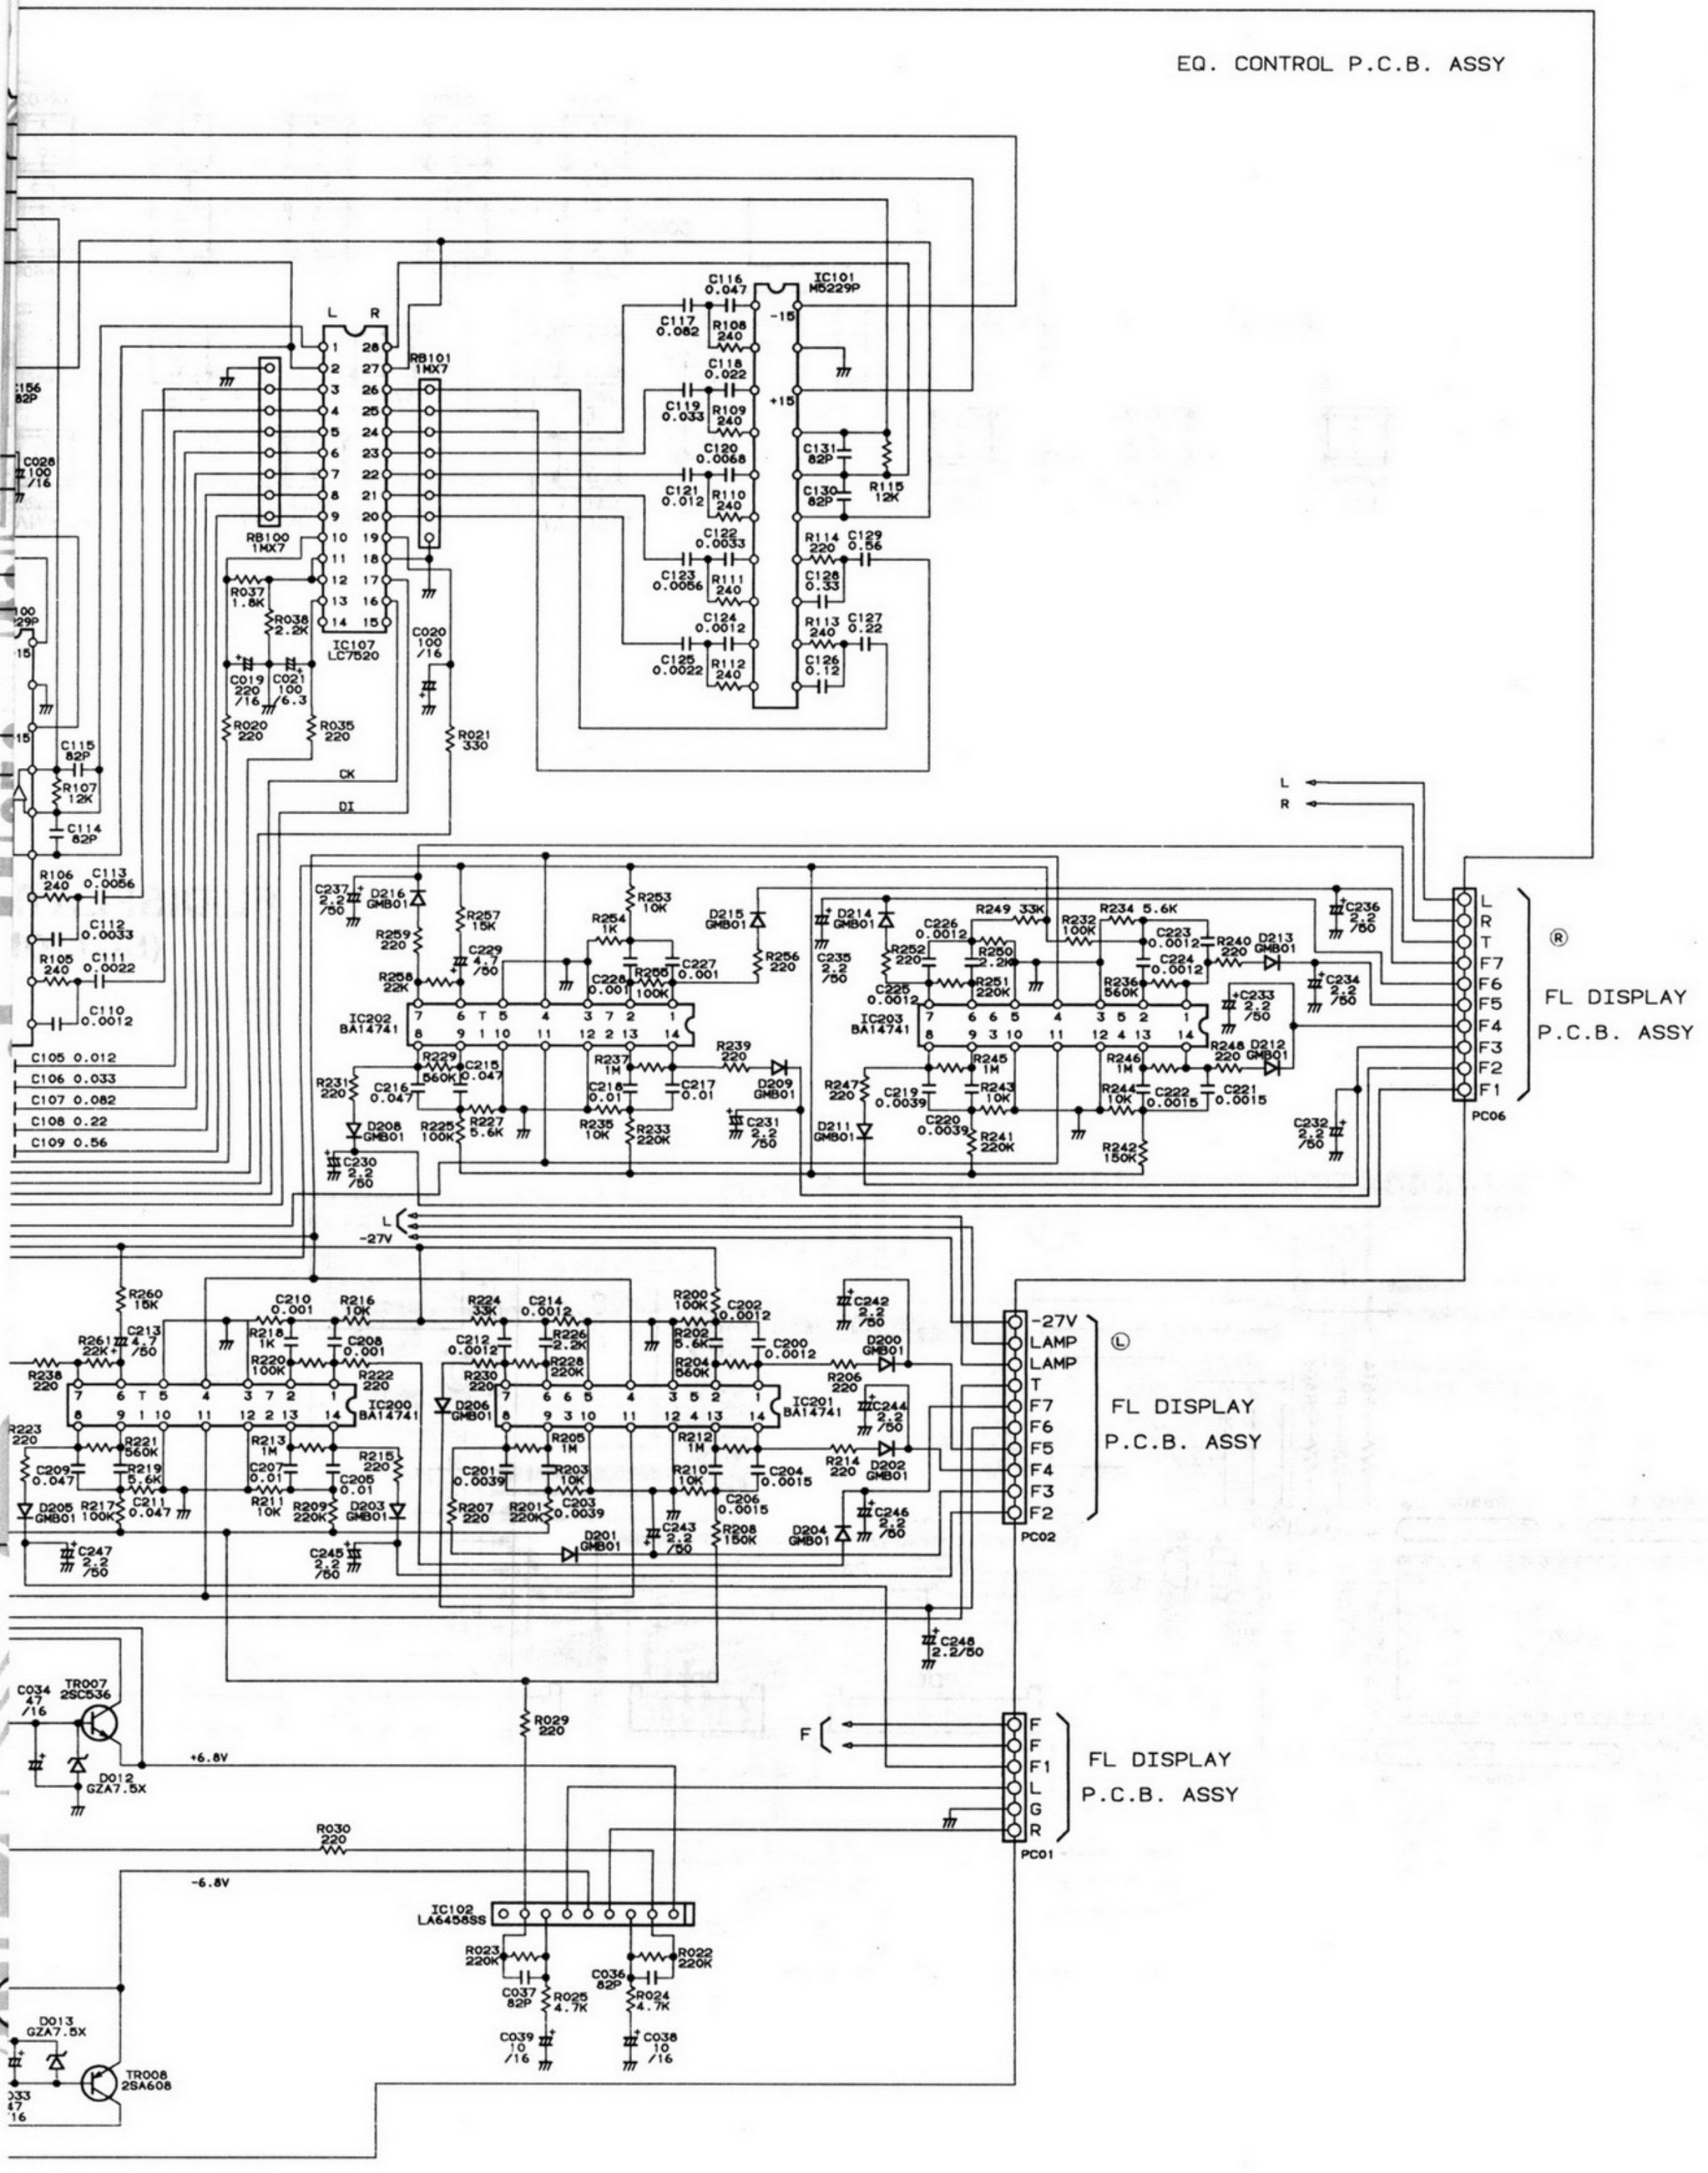

Fisher EQ 9060 GFGF Archiv

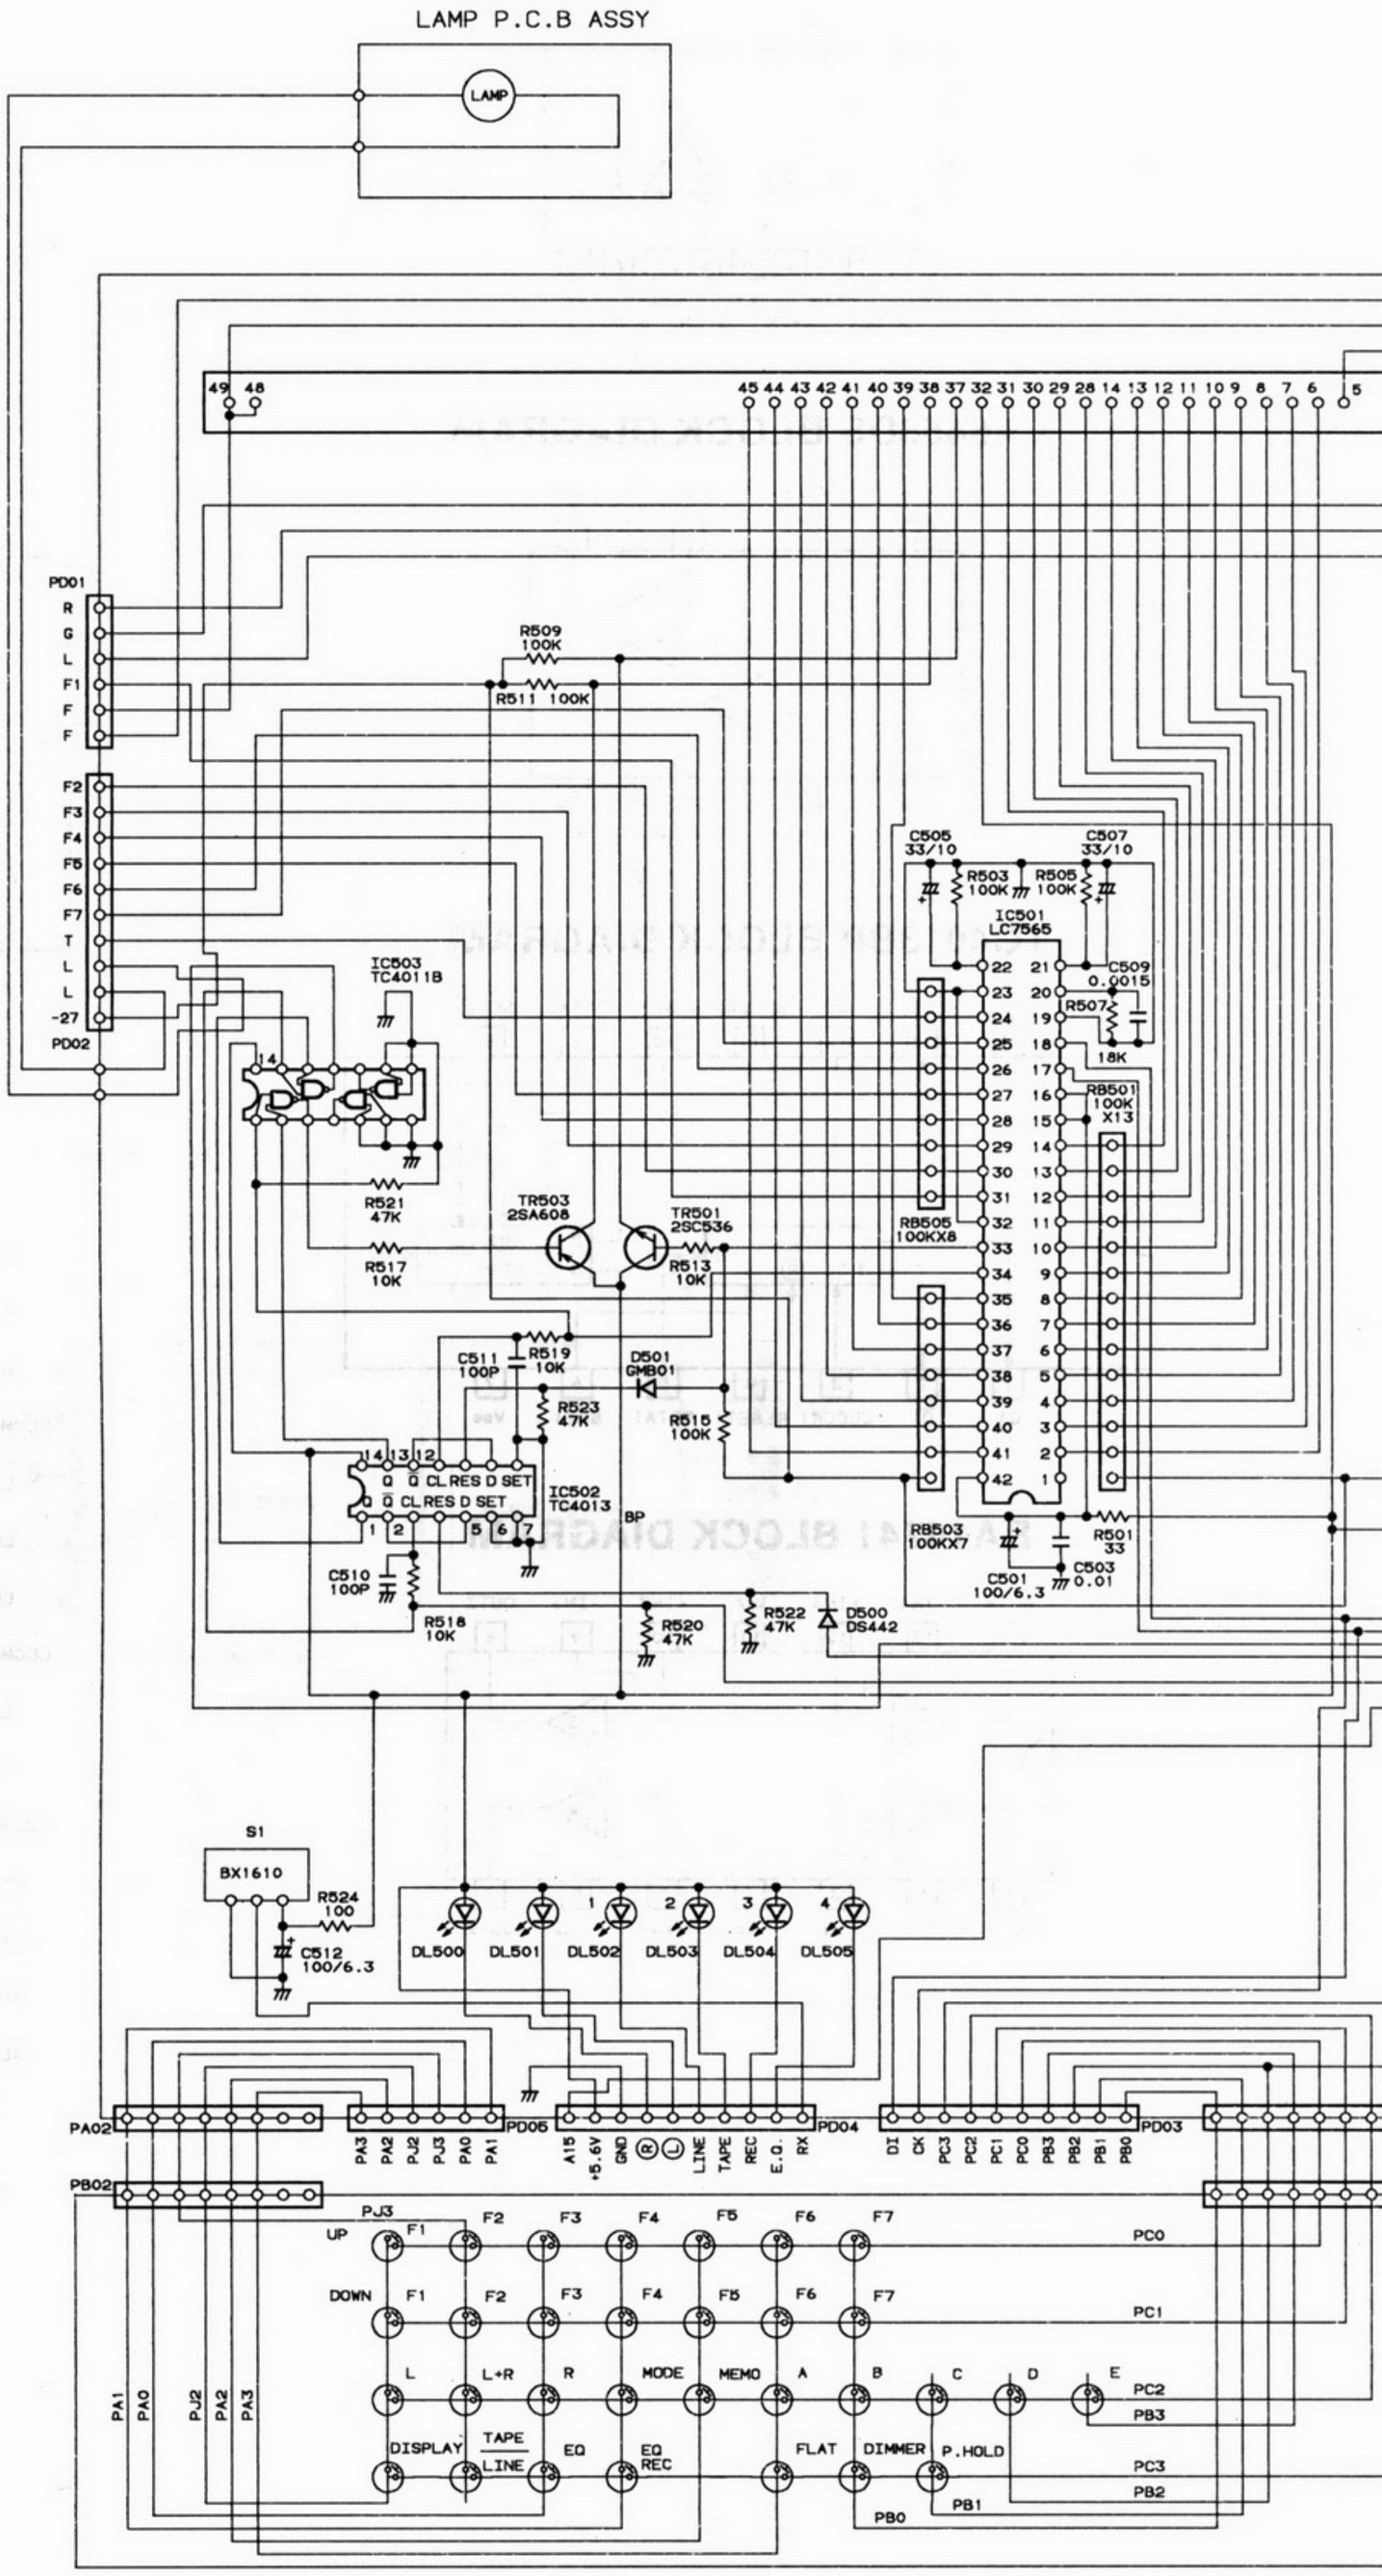

Fisher EQ 9060 GFGF Archiv

HEMATIC DIAGRAM (2)

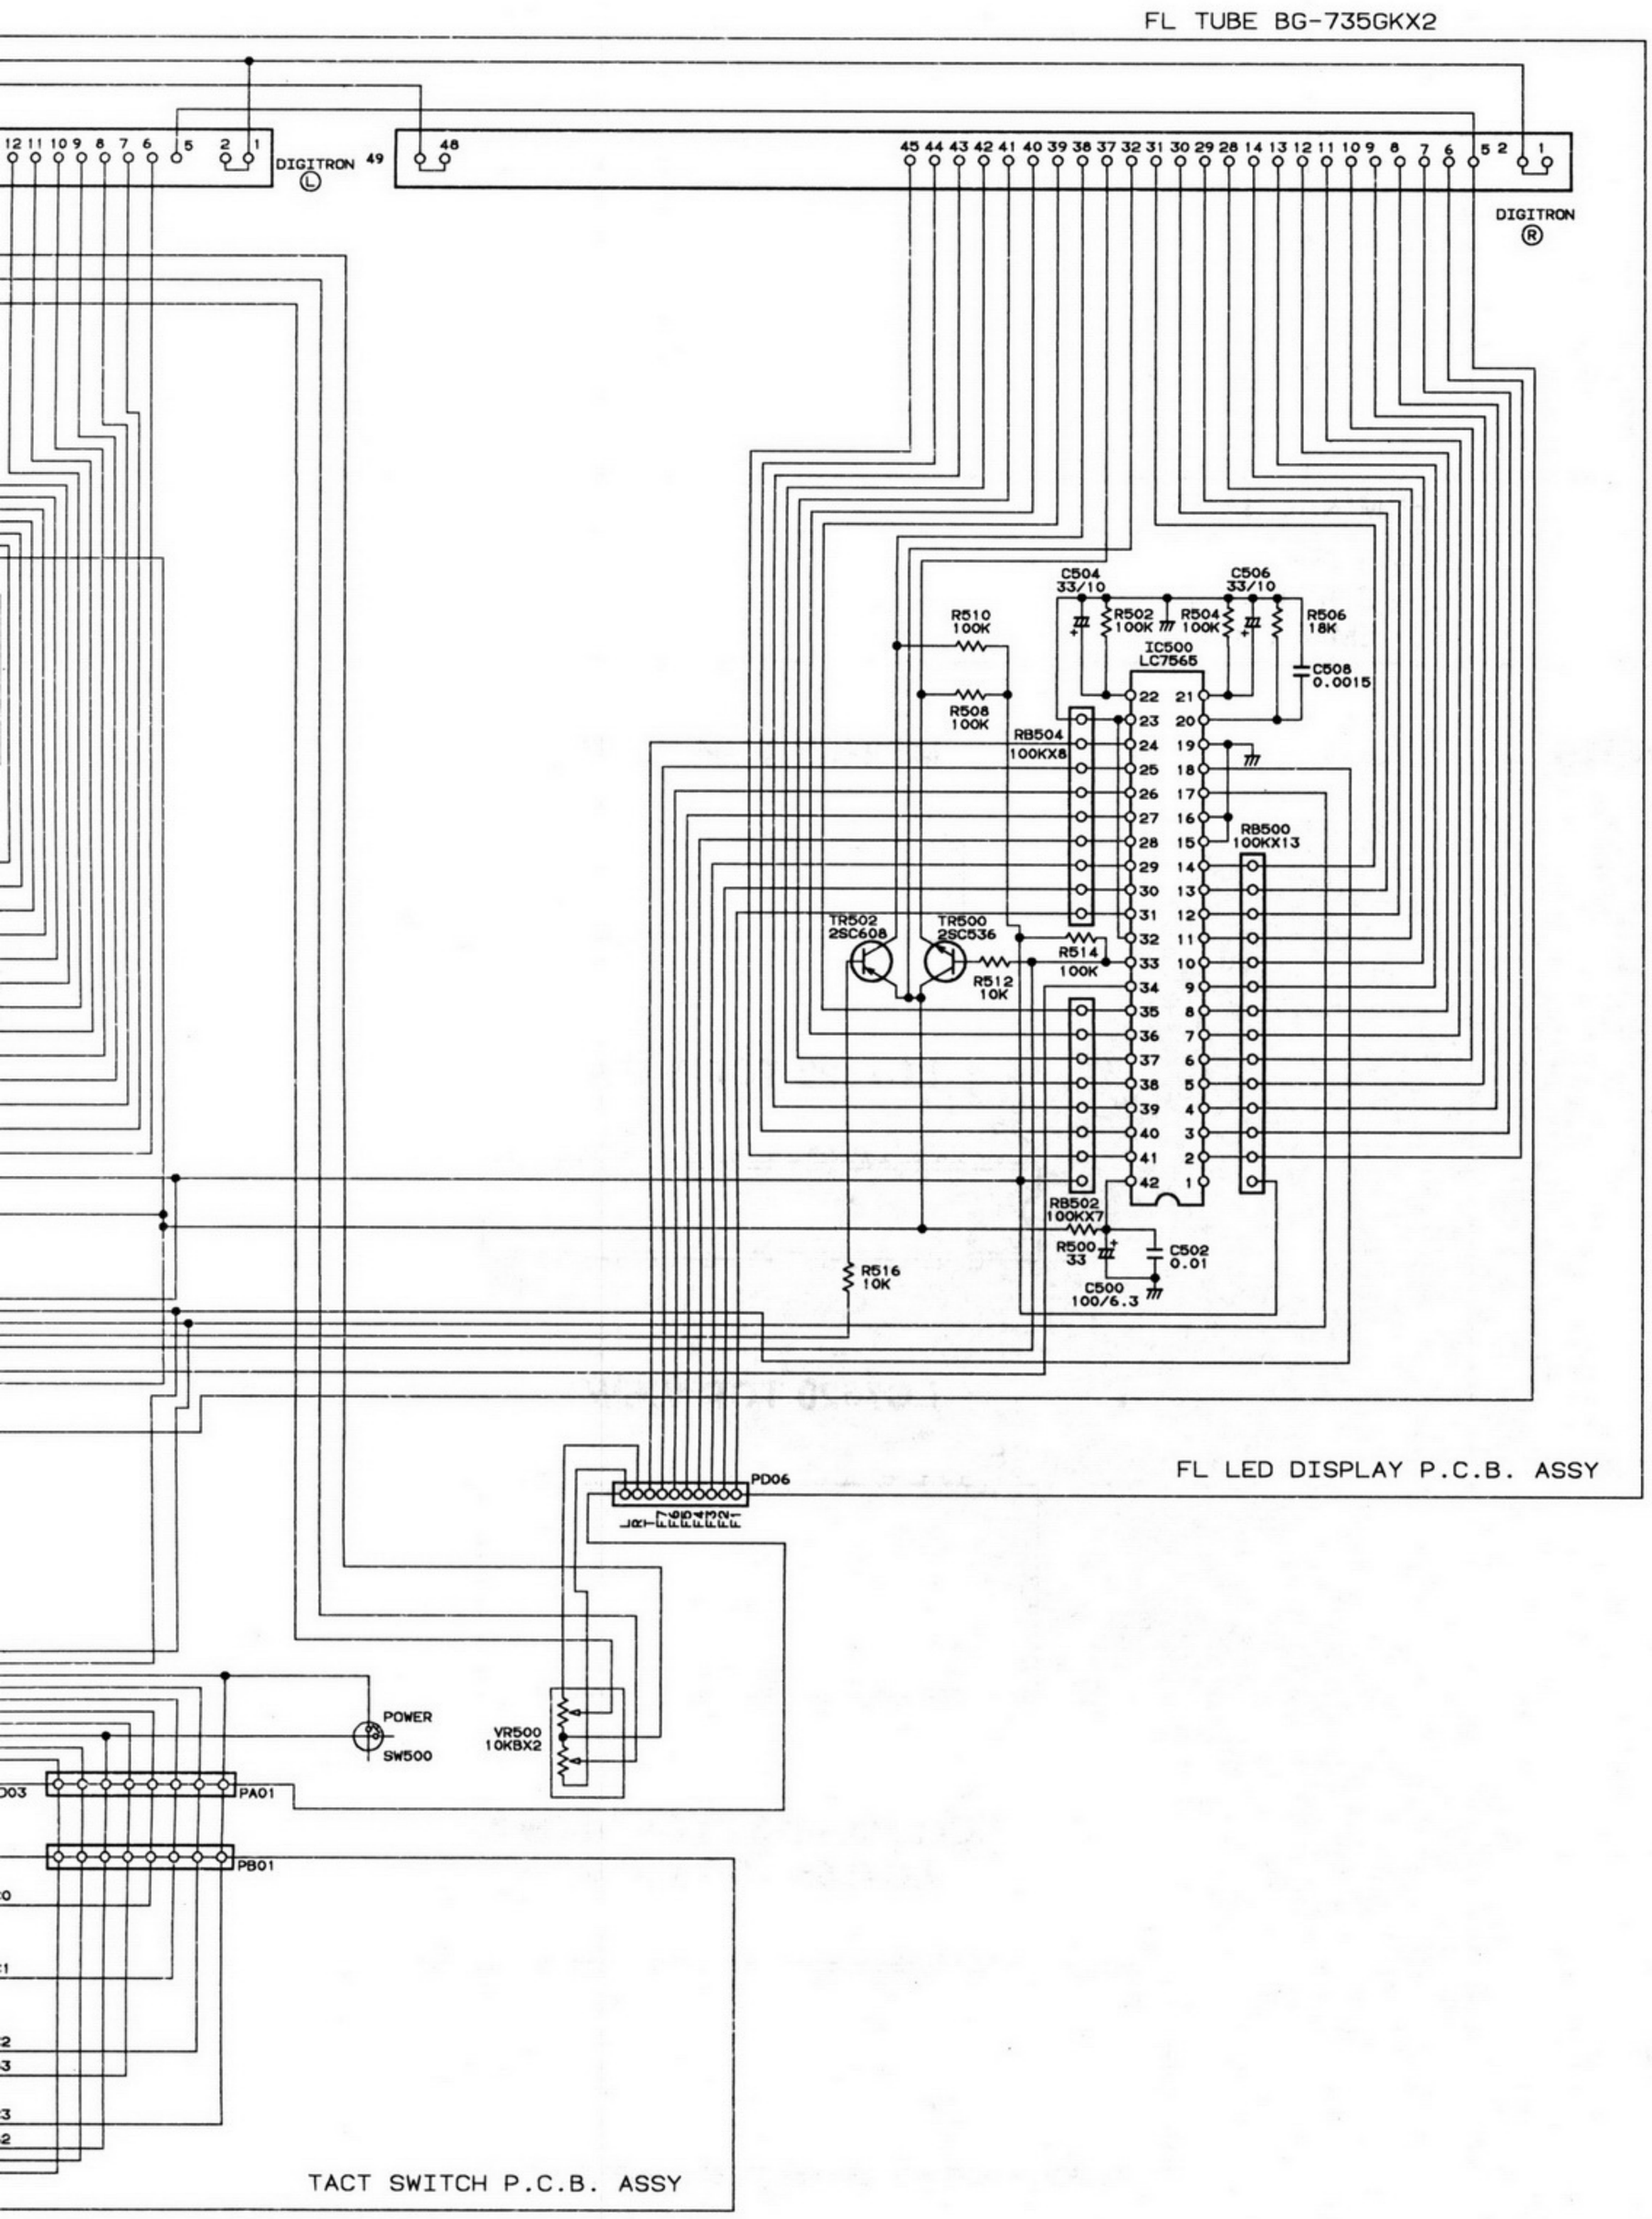

Fisher EQ 9060 GFGF Archiv