

Service

11110114
SM-RXFW18L
SVC MNL

91037004

34

1 ST


ual

Radio Cassette

Stereo Radio Cassette Recorder

RX-FW18L

(Black)(White)

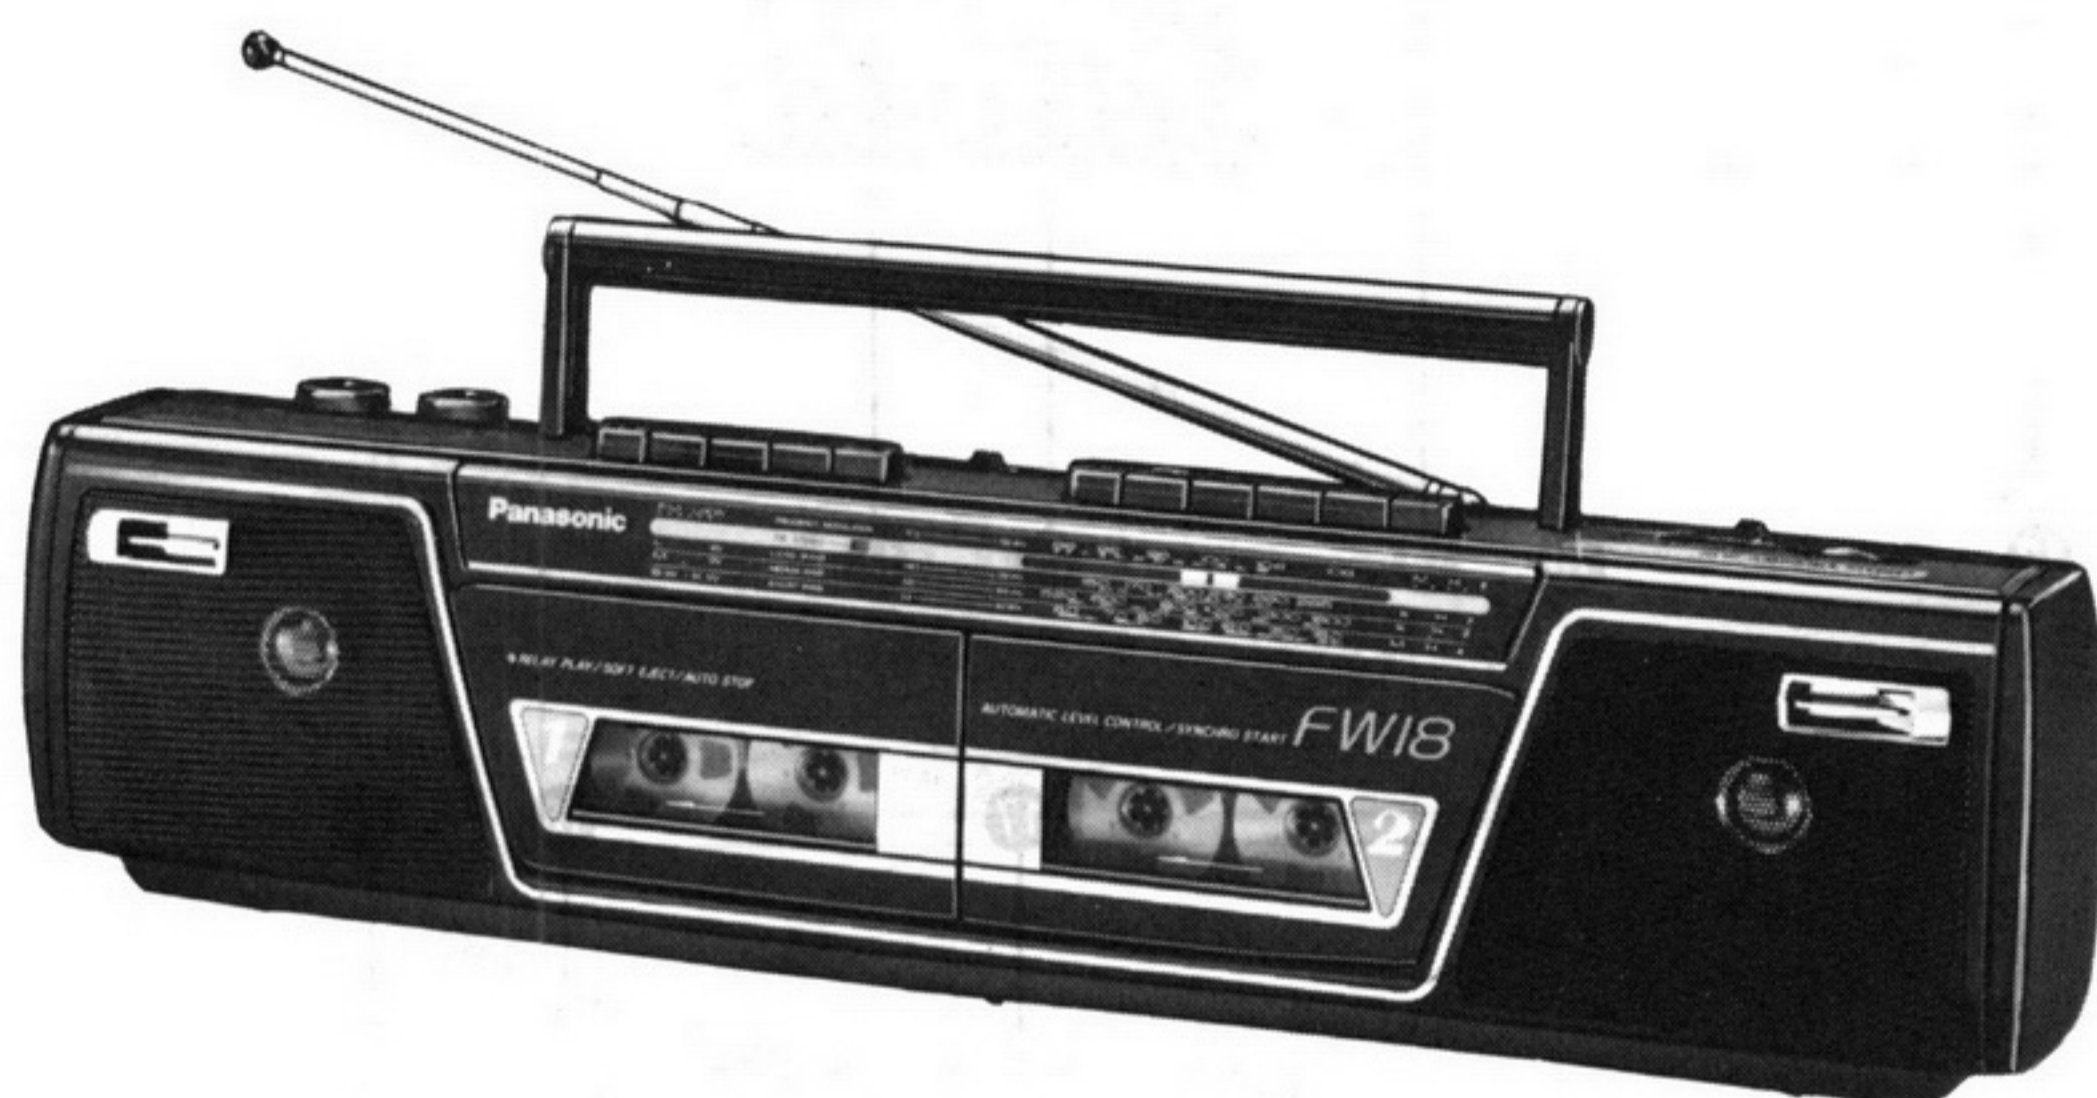

This is the Service Manual for the following areas.

[Z].... For all European areas except United Kingdom, F.R.Germany, France, Italy and Finland.

[ZE]....For United Kingdom.

[ZF]....For France.

RX-CW30 MECHANISM SERIES

■ SPECIFICATIONS

General:

Power Requirement: (Z),(ZF)...AC;220V,50Hz
(ZE)...AC;240V,50Hz
Battery;9V(Six"C"Size Flashlight Batteries)
(Panasonic UM-2 or equivalent)

Power Consumption: 16W(AC only)

Power Output: 14W(7Wx2)...PMPO

7W(3.5Wx2)...MPO

Speaker: Woofer;10cm PM Dynamic speaker(3Ω)

Tweeter;2cm Ceramic speaker(1KΩ)

Output: Headphones;32Ω(8~50Ω)ø3.5

Dimensions: 526 (W)×137 (H)×119 (D) mm

Weight; 2.5kg Without batteries

Radio Section;

Radio Frequency Range;

FM;87.5~108MHz
LW;148.5~285KHz(2020~1052m)
MW;520~1610KHz(577~186m)
SW;5.9~18MHz(50.8~16.7m)

Intermediate frequency;

FM;10.7MHz
(Z)/(ZF)...AM(LW/MW/SW);455KHz
(ZE).....AM(LW/MW/SW);470KHz

Sensitivity;

FM;2.0μV/50mW output (-3dB Limit Sens)
LW;282μV/m/50mW output
MW;79μV/m/50mW output
SW;10μV/50mW output

Tape Deck Section:

Frequency Response: 80~9,000Hz(with normal tape)

Tape Speed: 4.8cm/s

Track System: 4-track 2-channel stereo playback

Tape Deck Section

Frequency Response: 80~9,000Hz(with normal tape)

Recording System: AC bias,Magnet erase

Tape Speed: 4.8cm/s


Track System: 4-track 2-channel stereo recording and playback

Design and specifications are subject to change without notice.

Panasonic

Matsushita Electric Trading Co., Ltd.
P.O. Box 288, Central Osaka Japan

SCHEMATIC DIAG

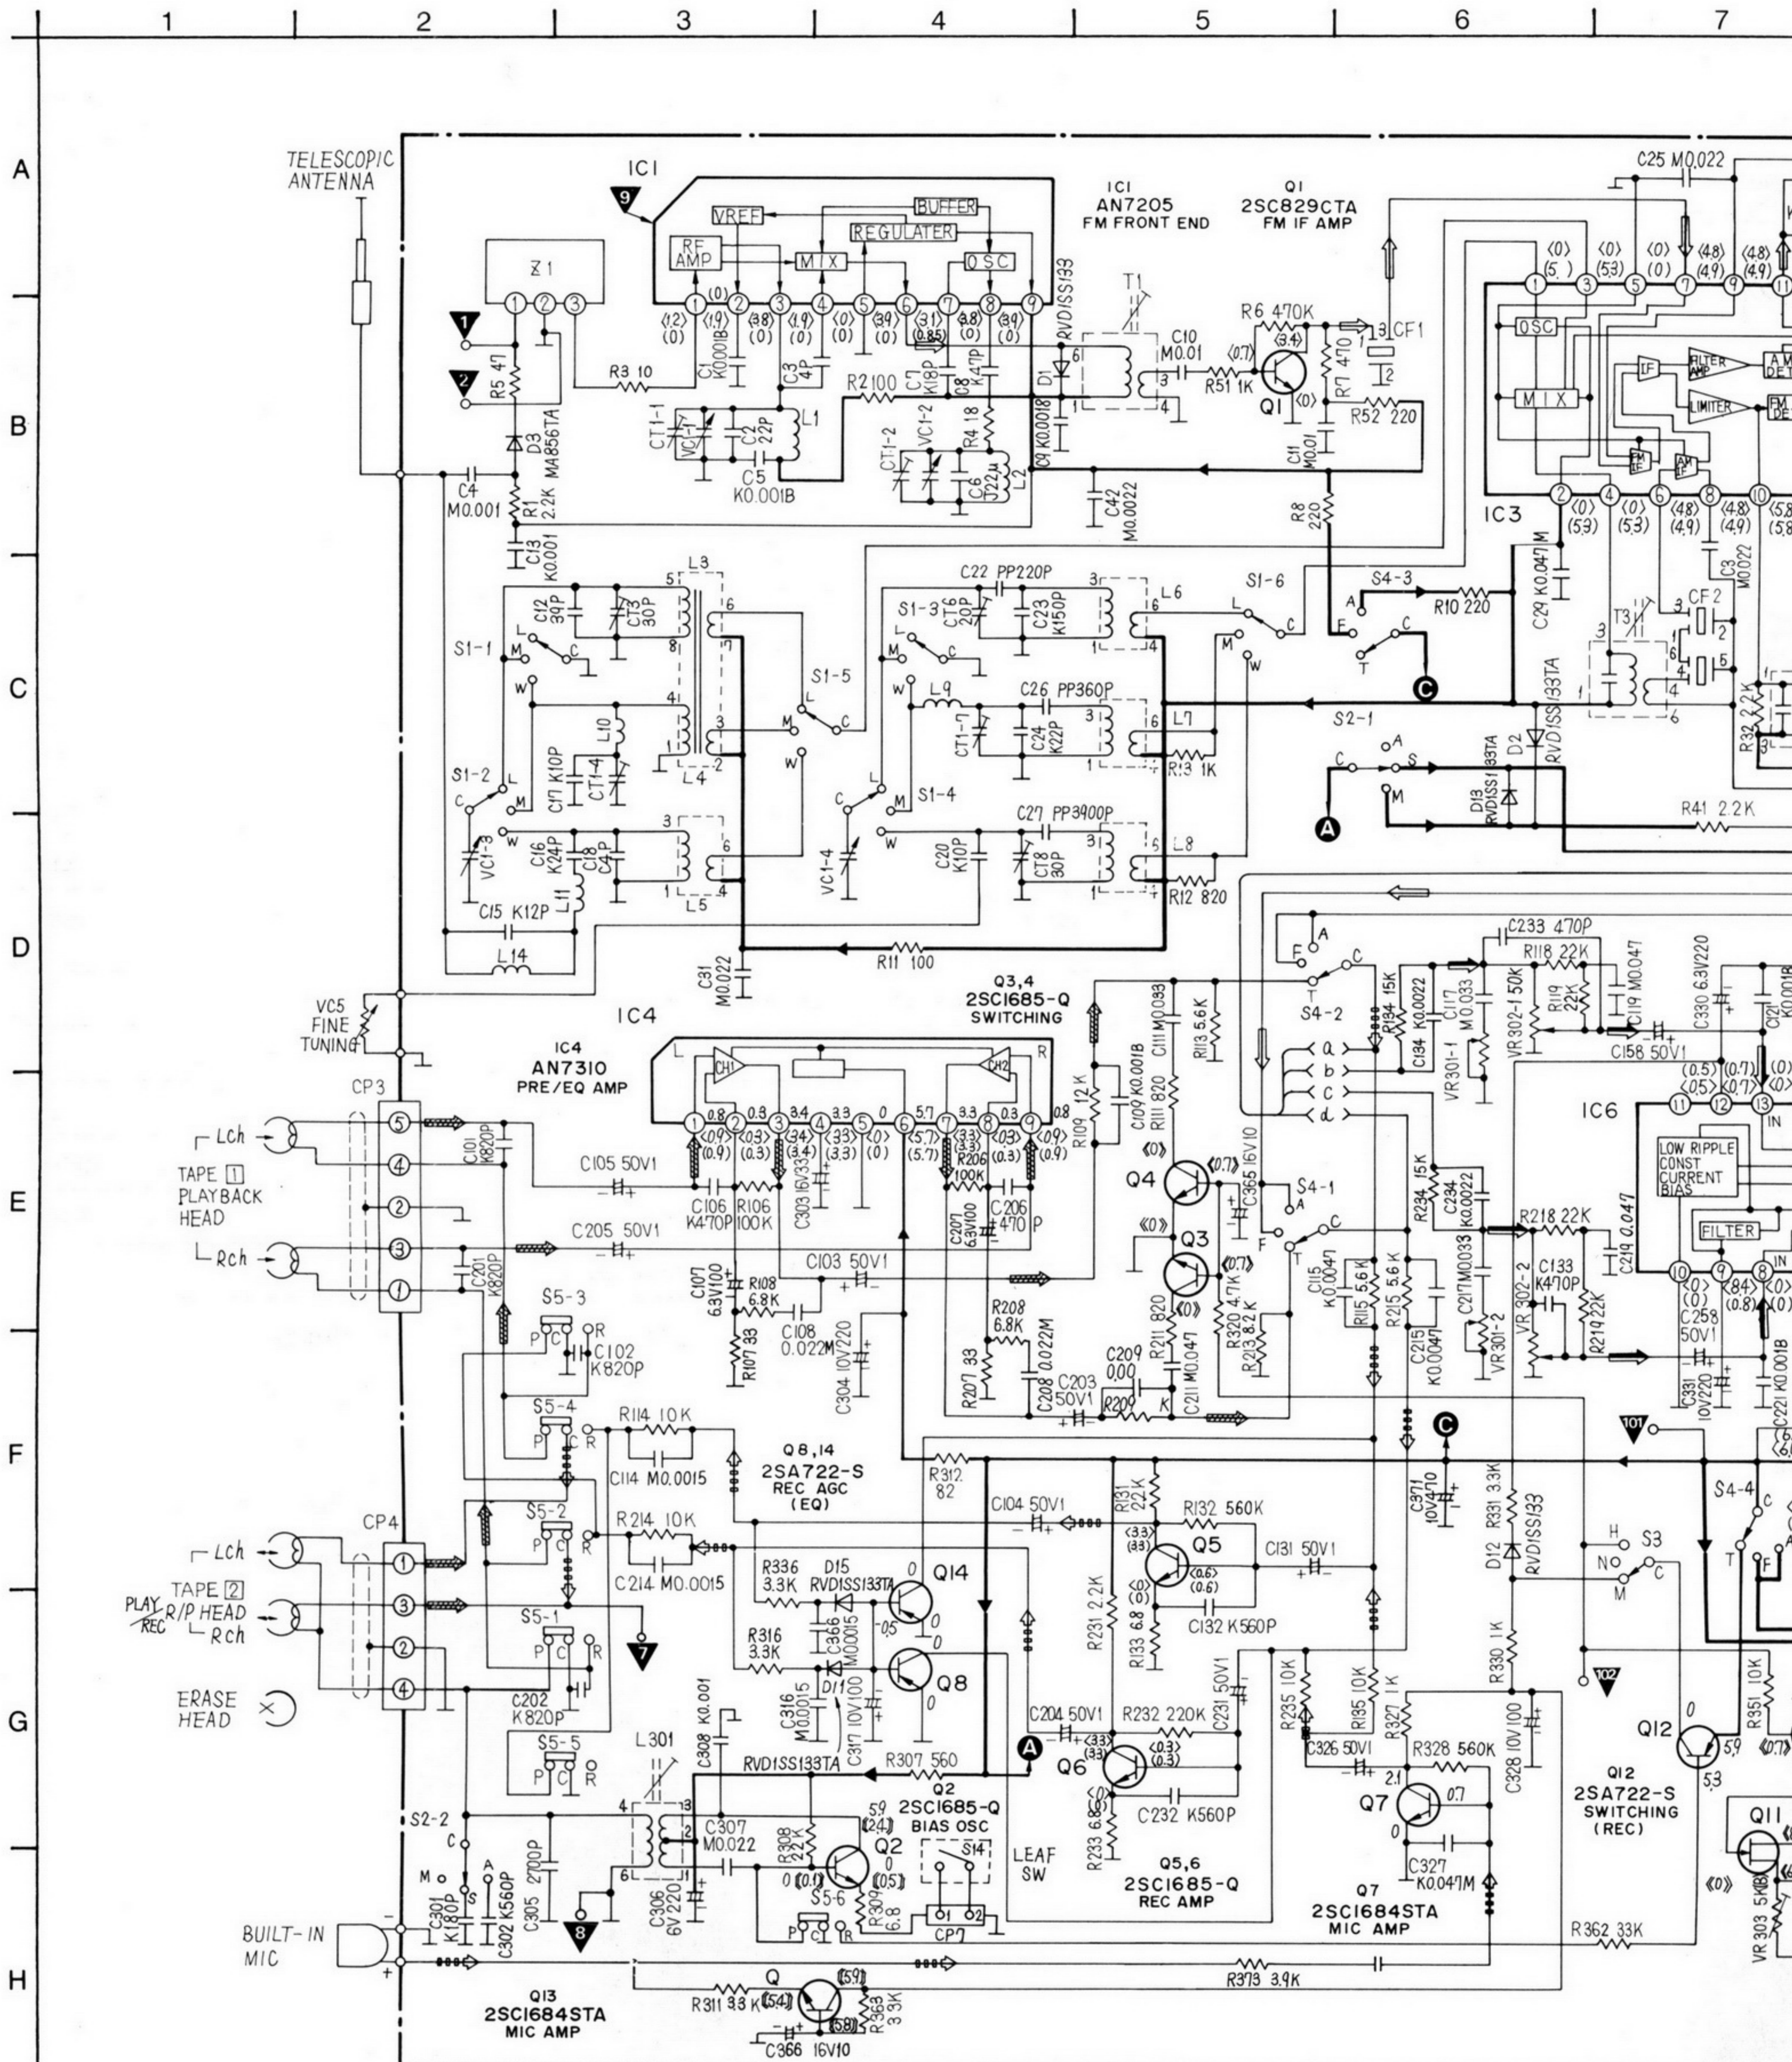

[Z]...For all European areas except United Kingdom, F.R. Germany, France, Italy and Finland.

[ZE]...For United Kingdom.

[ZF]...For France.

