

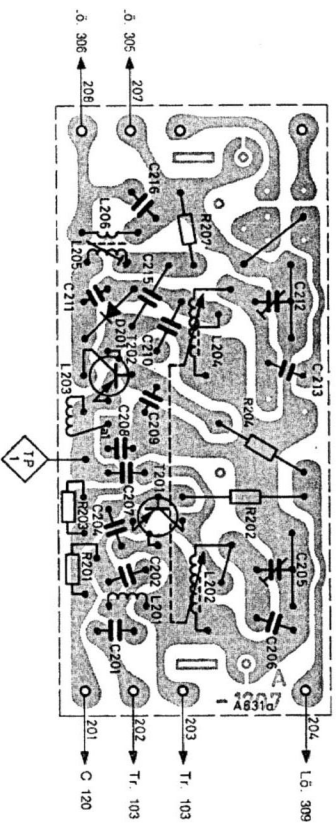


UKW-Platte
Verdrahtungs-
seite

**Tastatur-Platte
Verdrahtungs-
seite**

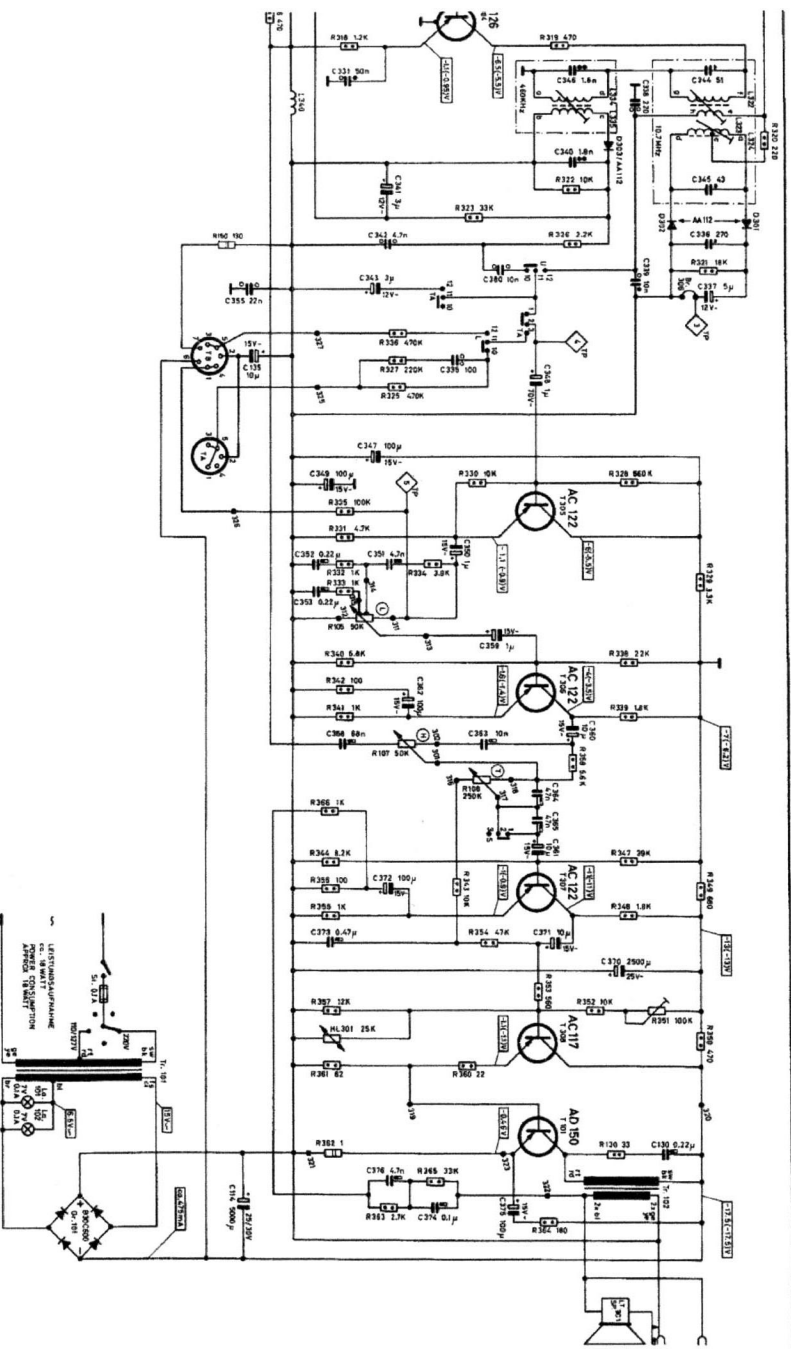


N OF COMPONENTS	
POSITIONS - NR.	
POSITION - NO	
101 - 100	
200 - 200	
300 - 300	
400 - 400	

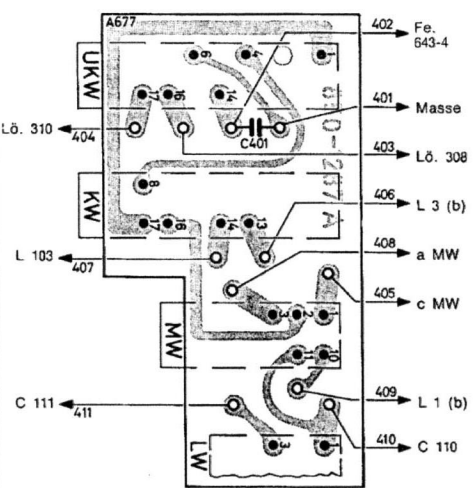

STROM-LIND STATIONING SERVICE OBTAINED
BEE AVALANCH METER FM WITH VOLTMETER
20 mV/mv - 80000V

CURRENTS AND VOLTAGES MEASURED AT ALL
(IN BRACKETS) WITH INSTRUMENT
20 KWHRS / MONTHLY TO POLE)



WELLENLÄNGE		WAVE-LENGTHS	
LW (FM)	87 - 104 MHz (mc)		
MW (SW)	5.0 - 8 MHz (mc)		
MW	910 - 1040 kHz (kc)		
LW	145 - 205 kHz (kc)		
ZP (HF)	460 kHz (kc) - 70.7 MHz (mc)		



RESEARCH / CERAMIC	STIMOTEX	PAPER / PAPER	POLYESTER

Änderungen vorbehalten